



TOLERANCES:
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.

A4

NOTES
THIS DRAWING IS COPYRIGHT. DO NOT SCALE THIS DRAWING, CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE, ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD


Studs have swaged ends to fit inside the track so that both studs & tracks are the same width to assist in providing as flush a finish as is possible

APPLICABLE TO BOTH HEAD & BASE TRACKS, INTO EITHER CONCRETE OR HOT ROLLED STEEL

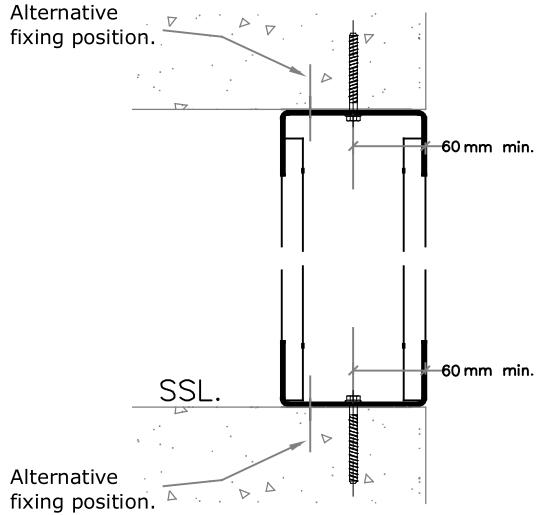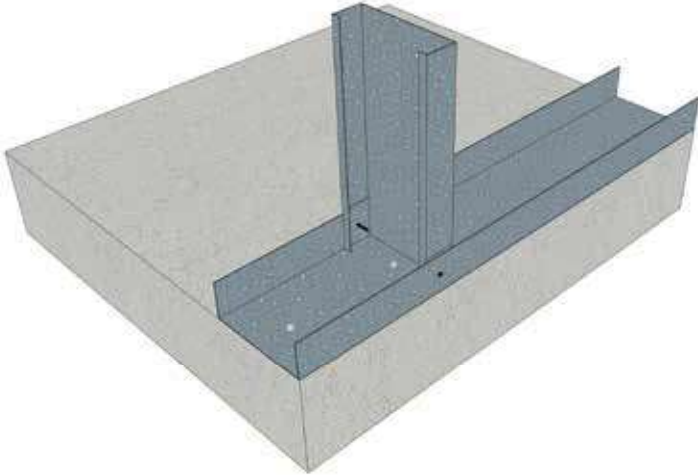

TYPICAL SECTION


3D VIEW

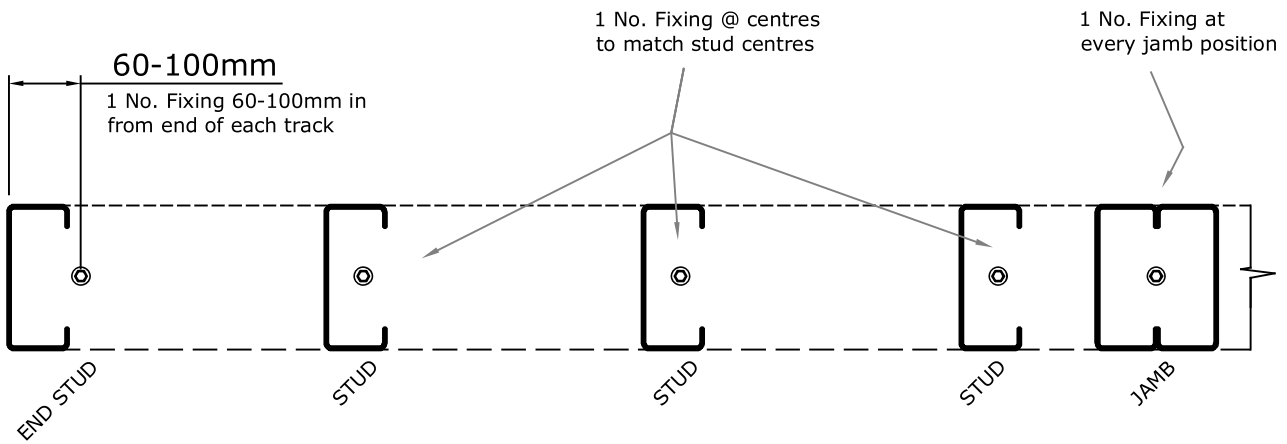

PLAN
HEAD & BASE TRACKS

NOTES

1. Minimum fixing requirements to head and base tracks, U.N.O.
2. Installer to confirm line and level of track base prior to fixing and report deviations greater than +/- 15mm, or any overhangs exceeding the limits highlighted in detail 209
3. Each track length to have fixing between 60mm and 100mm from each end.
4. DPC to be included below base tracks if specified by Architect

Title: TYPICAL FIXING DETAIL FOR HEAD & BASE TRACKS (S & T)					STAGE:		
					Preliminary:	<input type="checkbox"/>	
					Approval:	<input type="checkbox"/>	
					Construction:	<input checked="" type="checkbox"/>	
Drawn By: PK	Scale: NTS	Drawing No. 201	Revision: G	Approved By: AH/KB	Date: AUG 2020		

EOS Framing Ltd, Heighington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030