


A4

TOLERANCES:
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.


NOTES
THIS DRAWING IS COPYRIGHT. DO NOT SCALE THIS DRAWING. CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE, ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD

Studs have swaged ends to fit inside the track so that both studs & tracks are the same width to assist in providing as flush a finish as is possible




Head track
(Fixing to suit structure)

Deflection head bracket fixed to vertical stud through slotted holes using 2 No 6.3 x 25mm screws with large washer heads (EOS-1003 or similar approved). Screws fixed central in slot to allow for movement.

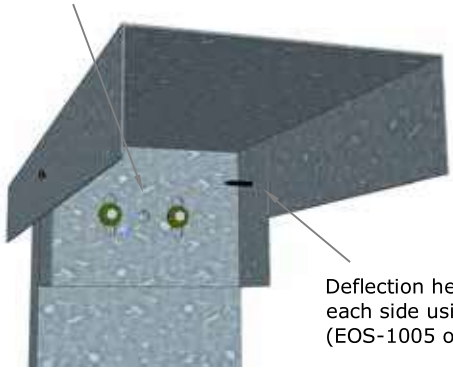


Deflection head bracket fixed to head track each side using 5.5 x 25mm Tek screws (EOS-1005 or similar approved)

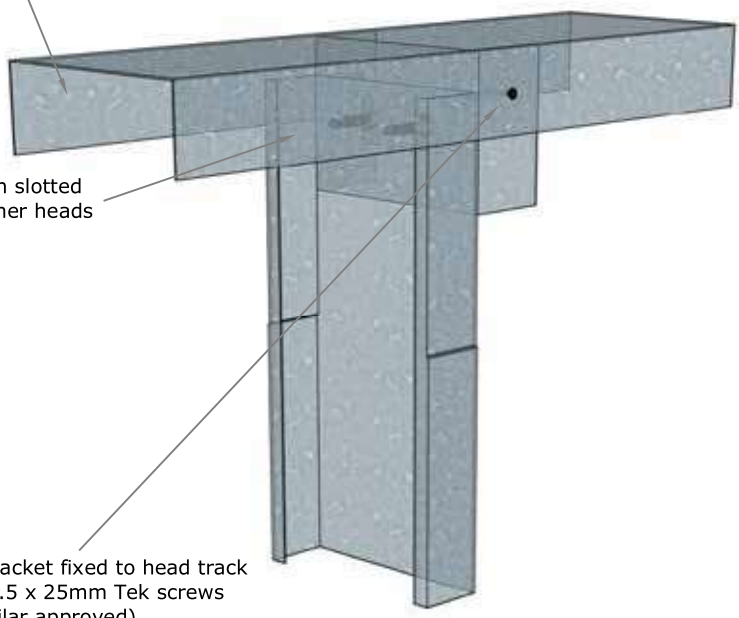

TYPICAL DEFLECTION HEAD

Vertical Stud
Base Track

Base track fixed to vertical stud each side using 5.5 x 25mm Tek screws (EOS-1005 or similar approved)

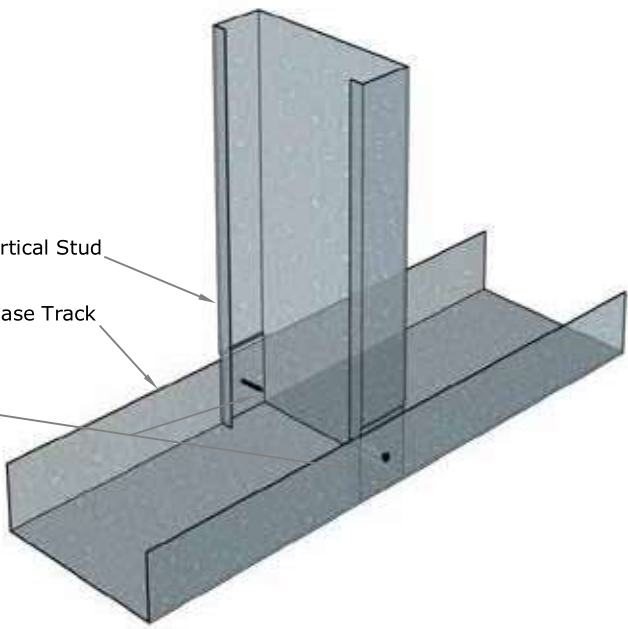

TYPICAL STUD BASE FIXING

NOTE
1. Bracket length and slot size to suit required structural deflections

Title: TYPICAL STUD BASE FIXING & DEFLECTION HEAD BRACKET (S & T)					STAGE:	
					Preliminary:	<input type="checkbox"/>
					Approval:	<input type="checkbox"/>
					Construction:	<input checked="" type="checkbox"/>
Drawn By:	Scale:	Drawing No.	Revision:	Approved By:	Date:	
TE	NTS	204	F	AH/KB	AUG 2020	



EOS Framing Ltd, Heighington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030