


TOLERANCES:
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.

A4


NOTES

THIS DRAWING IS COPYRIGHT. DO NOT SCALE THIS DRAWING. CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE, ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD

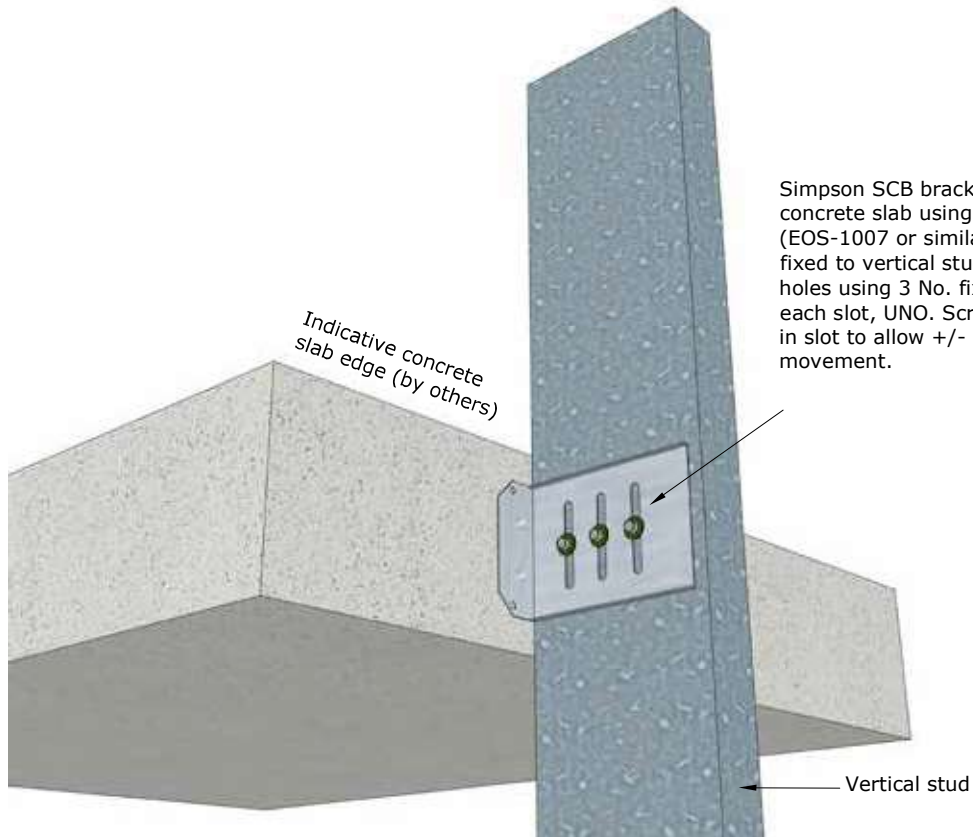


Simpson SCB bracket fixed to face of concrete slab using min 2 No fixings (EOS-1007 or similar approved) and fixed to vertical stud through slotted holes using 3 No. fixings supplied in each slot, UNO. Screws fixed central in slot to allow +/- 25mm of movement.

TYPICAL OVERSAIL STUD FIXING

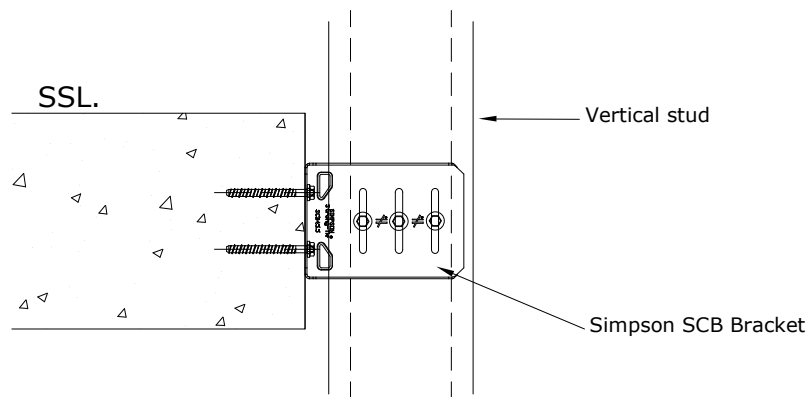

TYPICAL SECTION

EOS Framing Ltd, Heighington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030

Title: TYPICAL OVERSAIL STUD FIXING DETAIL (S & T)					STAGE:		
					Preliminary:	<input type="checkbox"/>	
					Approval:	<input type="checkbox"/>	
					Construction:	<input checked="" type="checkbox"/>	
Drawn By:	Scale:	Drawing No.	Revision:	Approved By:	Date:		
TE	NTS	210	D	AH/KB	AUG 2020		