
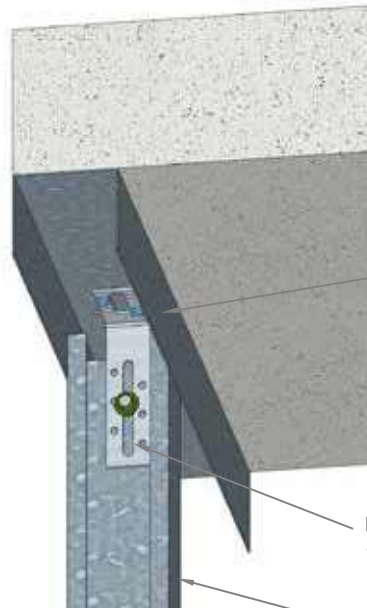


TOLERANCES:
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.

A4

NOTES
THIS DRAWING IS COPYRIGHT. DO NOT SCALE THIS DRAWING. CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE. ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD

Studs have swaged ends to fit inside the track so that both studs & tracks are the same width to assist in providing as flush a finish as is possible

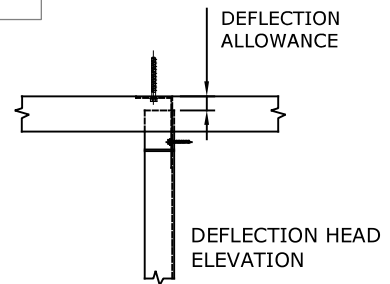


Head track
(Fixing to suit structure)

EFIXS-100 Bracket to be fixed to each stud - brackets can be fixed to either web face

Vertical stud


EFIXS100 DEFLECTION DETAIL

2 No. Titen fixing (EOS-1007 or similar approved) in slot to fix bracket into concrete slab - head track to be pre-drilled prior to fixing in place



1 No. 6.3 x 25mm Tek screw with large washer head (EOS-1003 or similar) to fix bracket into cold formed steel. Fixings located centrally in slot.

EFIXS100 FIXING DETAIL

Title: TYPICAL DEFLECTION HEAD FIXING DETAIL FOR 65mm STUDS (S & T)					STAGE:		
					Preliminary:	<input type="checkbox"/>	
					Approval:	<input type="checkbox"/>	
					Construction:	<input checked="" type="checkbox"/>	
Drawn By:	Scale:	Drawing No.	Revision:	Approved By:	Date:		
PK	NTS	212	F	AH/KB	AUG 2020		

EOS Framing Ltd, Heighington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030