


TOLERANCES:
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.

A4

NOTES

THIS DRAWING IS COPYRIGHT: DO NOT SCALE THIS DRAWING, CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE, ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD


Studs have swaged ends to fit inside the track so that both studs & tracks are the same width to assist in providing as flush a finish as is possible



Deflection head track
(Fixing to suit structure see standard detail 215)




TYPICAL DEFLECTION HEAD

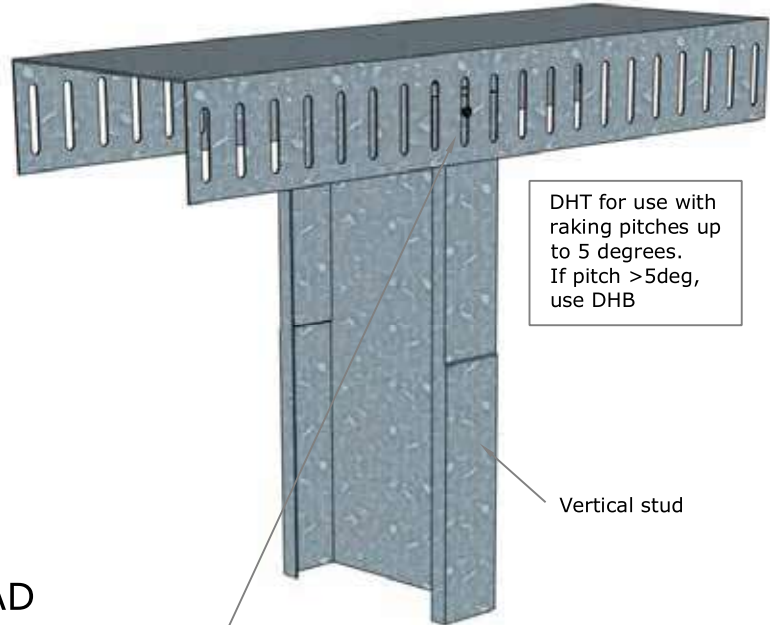

DHT for use with raking pitches up to 5 degrees. If pitch >5deg, use DHB

Vertical swaged stud fixed to Deflection Head Track through slotted holes using 2 No 5.5 x 25mm tek screws (1 No. each side) (EOS-1005 or similar approved). Screws fixed central in slot to allow +/- 25mm of movement

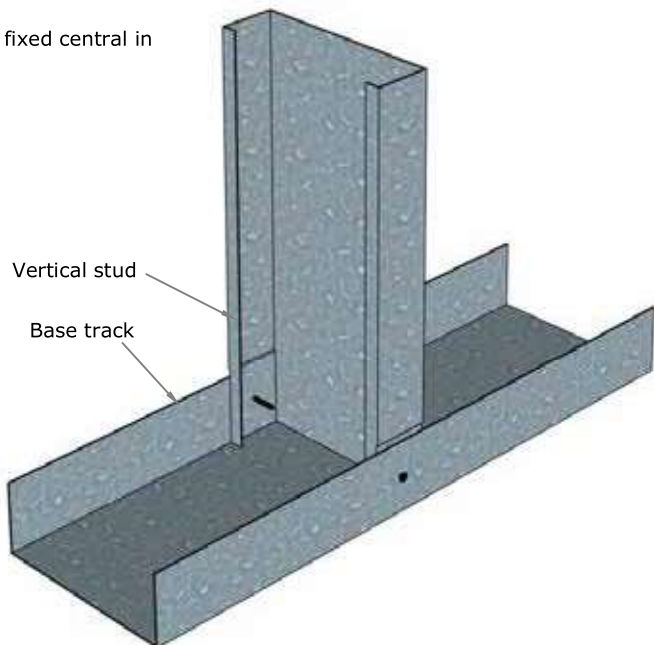

Base track fixed to vertical swaged stud each side using 5.5 x 25mm Tek screws (EOS-1005 or similar approved)

TYPICAL STUD BASE FIXING

Title: TYPICAL STUD BASE FIXING & DEFLECTION HEAD TRACK (S & T)					STAGE:	
					Preliminary:	<input type="checkbox"/>
					Approval:	<input type="checkbox"/>
					Construction:	<input checked="" type="checkbox"/>
Drawn By:	Scale:	Drawing No.	Revision:	Approved By:	Date:	
PK	NTS	214	D	AH/KB	AUG 2020	



EOS Framing Ltd, Heighington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030