


A4

**TOLERANCES:**  
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.


**NOTES**  
THIS DRAWING IS COPYRIGHT: DO NOT SCALE THIS DRAWING. CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE, ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD

Studs have swaged ends to fit inside the track so that both studs & tracks are the same width to assist in providing as flush a finish as is possible

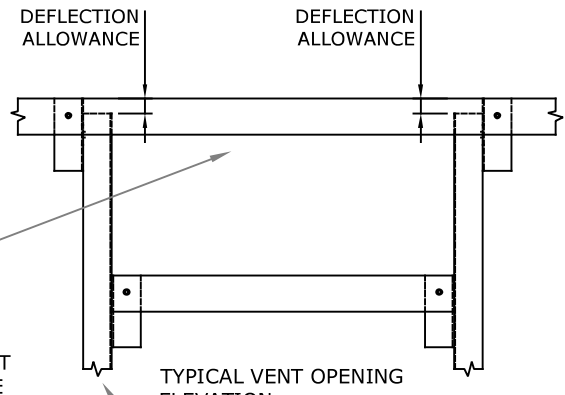

THE HEAD TRACK CAN BE CUT OUT LOCALLY IF IT CLASHES WITH THE VENT HOWEVER PLEASE ENSURE THAT A FIXING IS PLACED A 50-100mm AWAY FROM EACH END OF TRACK

DEPENDING ON THE DIMENSIONS AND POSITION OF THE VENT OPENING DOUBLE MEMBERS MAY BE REQUIRED

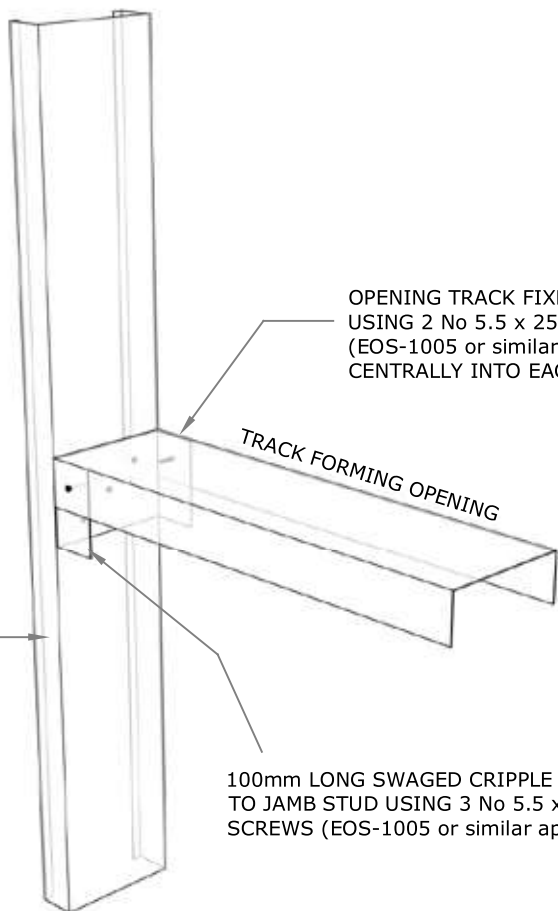

OPENING TRACK FIXED INTO CRIDDLE TRACK USING 2 No 5.5 x 25mm TEK SCREWS (EOS-1005 or similar approved) ONE FIXING CENTRALLY INTO EACH FLANGE.

100mm LONG SWAGED CRIDDLE TRACK FIXED TO JAMB STUD USING 3 No 5.5 x 25mm TEK SCREWS (EOS-1005 or similar approved)

EOS Framing Ltd, Heighington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030

Title: TYPICAL VENT OPENING CONNECTION DETAIL (S & T)					STAGE:	
					Preliminary:	<input type="checkbox"/>
					Approval:	<input type="checkbox"/>
					Construction:	<input checked="" type="checkbox"/>
Drawn By:	Scale:	Drawing No.	Revision:	Approved By:	Date:	
PK	NTS	270	E	AH/KB	AUG 2020	

