


TOLERANCES:
Construction tolerances between frames is -0mm +2mm. Frames are manufactured and assembled to +0mm -2mm.

A4

NOTES
THIS DRAWING IS COPYRIGHT: DO NOT SCALE THIS DRAWING, CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE, ONLY FIGURED DIMENSIONS TO BE WORKED FROM. ALL ERRORS AND DISCREPANCIES MUST BE IMMEDIATELY REPORTED TO THE DESIGN OFFICE OF EOS FRAMING LTD

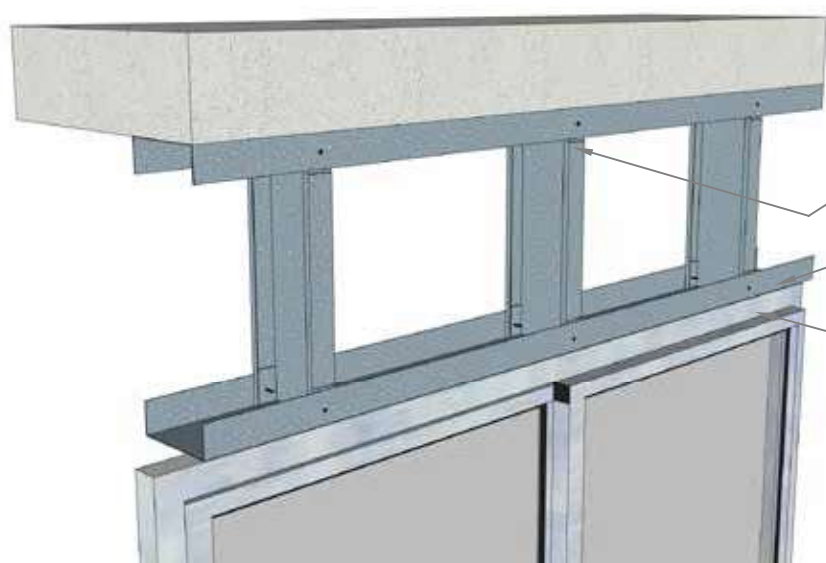


DEFLECTION BRACKETS OR DEFLECTION HEAD TRACK IS NOT REQUIRED ON THE STUDS ABOVE THE OPENING FOR A HARD FIXED LINTEL - DEFLECTION IS TO BE ALLOWED FOR ABOVE THE WINDOW

DEFLECTION GAP

WINDOW MANUFACTURER TO ALLOW ADDITIONAL TOLERANCE FOR MOVEMENT / DEFLECTION ABOVE THE HEAD OF THE WINDOW

TYPICAL HARD FIXED LINTEL ELEVATION

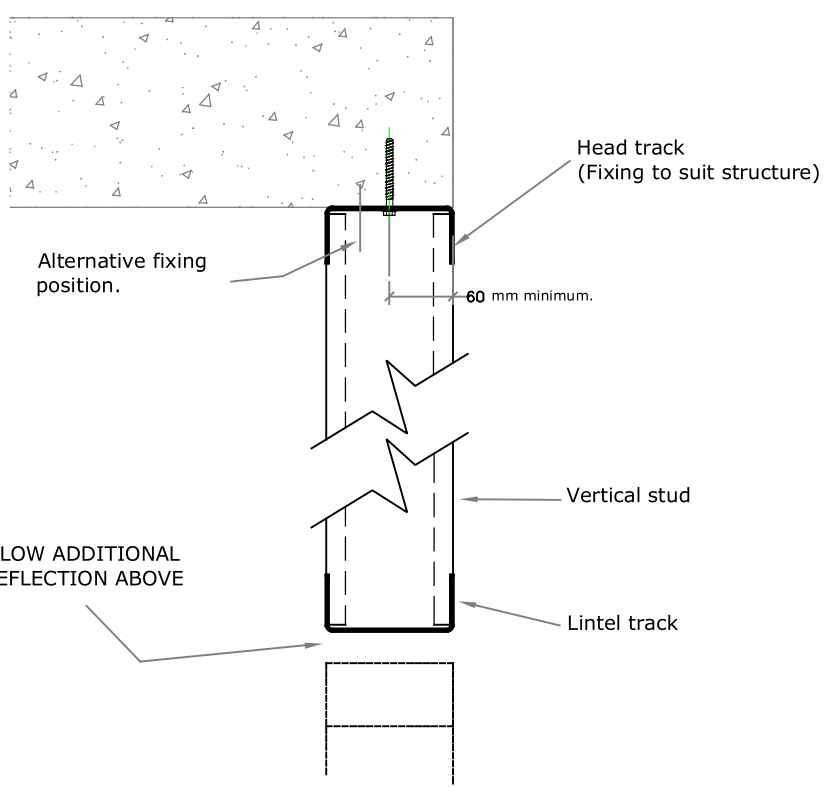

WINDOW MANUFACTURER TO ALLOW ADDITIONAL TOLERANCE FOR MOVEMENT / DEFLECTION ABOVE THE HEAD OF THE WINDOW

NOTE:- PROJECT SPECIFIC HARD FIXED LINTEL DETAILS WILL BE PROVIDED DURING DESIGN REVIEW WITH AN EOS ENGINEERS AS ADDITIONAL BRACKETRY OR WINDPOSTS MAY BE REQUIRED FOR LARGER OPENINGS

TYPICAL SECTION

Title: TYPICAL HARD FIXED LINTEL CONNECTION (S & T)					STAGE:		
					Preliminary:	<input type="checkbox"/>	
					Approval:	<input type="checkbox"/>	
					Construction:	<input checked="" type="checkbox"/>	
Drawn By:	Scale:	Drawing No.	Revision:	Approved By:	Date:		
PK	NTS	271	D	AH/KB	AUG 2020		

EOS Framing Ltd, Helghington Lane, Aycliffe Industrial Park, Newton Aycliffe, County Durham, DL5 6QG, Tel: 01325 303030